


STANDARD DETAIL DRAWINGS

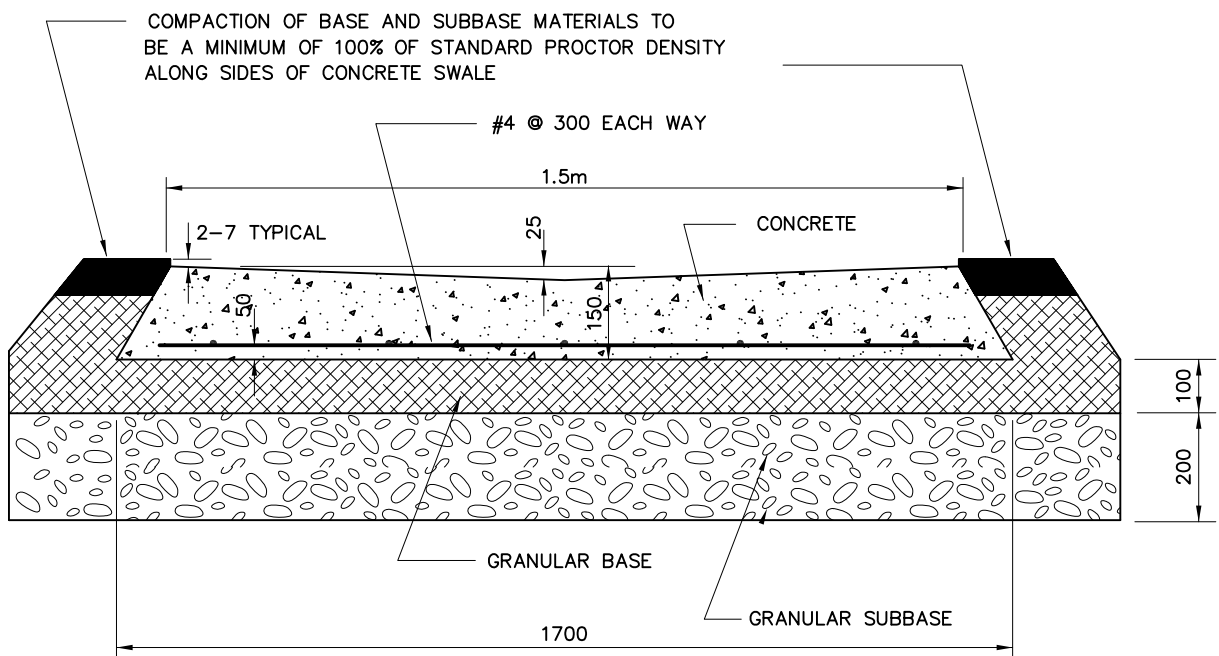

SECTION

NOTES:

1. CONCRETE TO HAVE A 28 DAY COMPRESSIVE STRENGTH OF 30 MPa.
2. BRUSH FINISH.
3. MINOR VARIATION IN CROSS SECTION WILL BE CONSIDERED TO ACCOMMODATE EXTRUDING OR SLIPFORM MACHINES.
4. MINIMUM GRADE 1.0%.
5. EXPANSION JOINTS AT EACH END ONLY.
6. THIS STANDARD IS ONLY TO BE USED IF SPECIAL APPROVAL IS OBTAINED FROM THE CITY ENGINEER.

\\WU\DRAWING\STD-DWGS\D44\D44-370

NOV. 2/98

**CONCRETE DRAINAGE SWALE
ACROSS ASPHALT**

SS-R23